



COUNTY ROADS, NOT CURBED WITH SIDEWALK
N.T.S.



SECTION A-A
N.T.S.

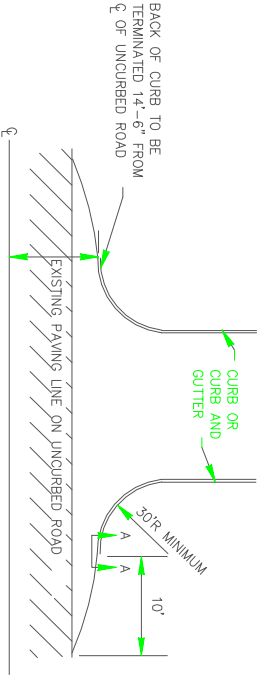

NOTE:
IF EXISTING UNCURBED ROAD IS WIDER THAN 29', THE DIMENSION IS TO BE 6'-6" FROM EXISTING EDGE OF PAVEMENT.

INTERSECTION OF CURBED AND UNCURBED ROADS
WITH NO TURN LANES
N.T.S.

PAVEMENT MATERIAL SCHEDULE

(A)	ASPH. CONC. 9.5 mm SUPERPAVE, 165 lb/yd ³ (1-1/2")
(B)	ASPH. CONC. 19 mm SUPERPAVE, 220 lb/yd ³ (2")
(C)	ASPH. CONC. 25 mm SUPERPAVE, 330 lb/yd ³ (3")
(D)	GRADED AGGREGATE BASE (CRUSHER RUN) 8"

****TACK COAT (ORSSH, SSF or AC30) TO BE USED AS REQUIRED
****PRIME COAT (RC70) TO BE USED AS REQUIRED

SLOPE TABLE

CUT SLOPE	FILL SLOPE
0'-5'	5' OR MORE
5'-5'	0'-5'
4:1	2:1
	4:1
	2:1

FULTON COUNTY STANDARD DETAIL 306
MISCELLANEOUS DETAILS

DATE	REVISIONS	DATE	REVISIONS	DGS/DRN/CHKD:KAH	APPROVED: LMI	DATE: 4-18-05
6-08	CS					

FULTON COUNTY PUBLIC WORKS
141 PRYOR ST. ATLANTA, GA. 30303
404-612-7400 FAX: 404-730-6325

306