




NOTE:
 RIP RAP CHECK DAMS TO BE PLACED
 AS NECESSARY DEPENDING ON GRADE
 OF DITCH.

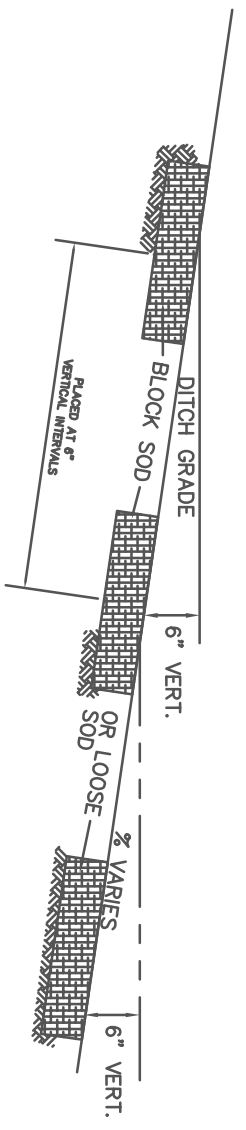

NOTE:
 SOD DITCH CHECKS MAY BE OF LOOSE SOD OR BLOCK SOD.
 SOD DITCH CHECKS TO BE PLACED AT 6" VERTICAL INTERVALS.
 THIS STANDARD TO BE USED WHERE EROSION IN ROADSIDE DITCHES
 IS EXCESSIVE DUE TO TYPE OF SOIL OR GRADE.

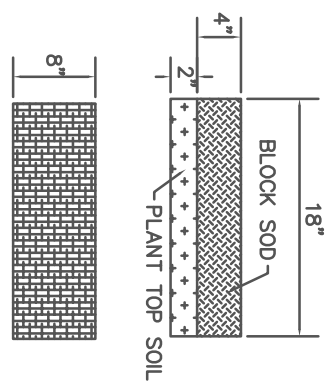

FULTON COUNTY STANDARD DETAIL 405 DETAIL OF SOD DITCH		DATE: 8/08	REVISIONS: NRR	DATE:	REVISIONS:	DGS/DRN/CHKD: REB	APPROVED: REW		FULTON COUNTY PUBLIC WORKS 141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-224-0498	DRAWING NO. 405
DATE:	REVISIONS:	DATE:	REVISIONS:	DATE:	REVISIONS:	DATE: 12-2-05				